
INTRODUCING THE



A smoke vent, roof access hatch and rooflight... THREE SOLUTIONS IN ONE

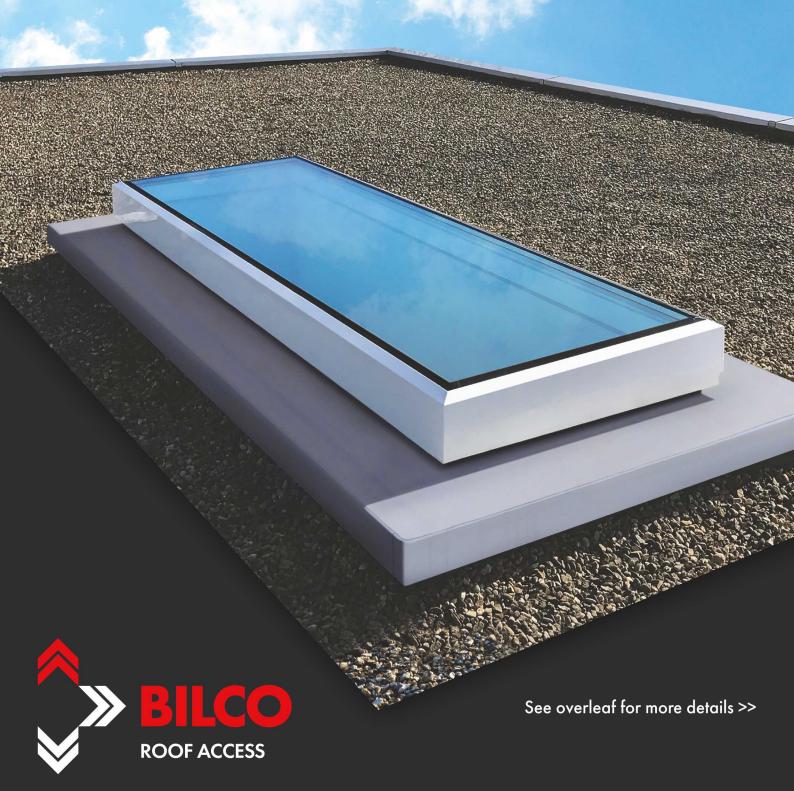

SKY Flatglass Key Features:

- >> A CE-marked smoke ventilator with a flat glass top
- Meets the requirements of building regulations document B and tested to EN 12101-2
- The sliding cover provides a stylish, functional approach to natural smoke ventilation
- >> Can be used for roof access with a fixed ladder
- Allows natural daylight into a room, stairwell or corridor
- >>> Ideal in exposed areas where a hinged opening is impractical

Technical Information

SKY-Flatglass-1 MF 1000 x 1500mm 1300 x 1800mm 1 m ² 190kg 250mm
1300 x 1800mm 1 m ² 190kg
1 m ² 190kg
190kg
W10
250mm
 Glass: Clear finish PVC Profiles: White Metal Profiles: White powder coating Upstand: White
PASS according to EN 1873: 2014 (air leakage less than 1.5m³/m²h or 0.5m³/hm, at pressure up to 150 Pa)
1.26 W/m ² K
 Toughened outside Aluminium spacer (space filled with argon 90%) Laminated LOW-E inside
A1 according to EN 13501 - 1
 Tested to BS EN 1873:2014 Class SB 1200 Resistance to large soft body impact Test impact energy: 1200 Joules
24V DC battery-backed control system
10 years for the glass2 years for the entire product (including the actuator)









For more information please visit www.bilcouk.co.uk or contact the Bilco office on +44 (0) 1284 701 696



