




## **HSE 75 STAINLESS STEEL Installation Instructions**


Howe Green Limited  
Marsh Lane, Ware,  
Hertfordshire SG12 9QQ

Tel: +44 (0) 1920 463230  
Fax: +44 (0) 1920 463231  
Email: [info@howegreen.co.uk](mailto:info@howegreen.co.uk)  
Web: [www.howegreen.co.uk](http://www.howegreen.co.uk)

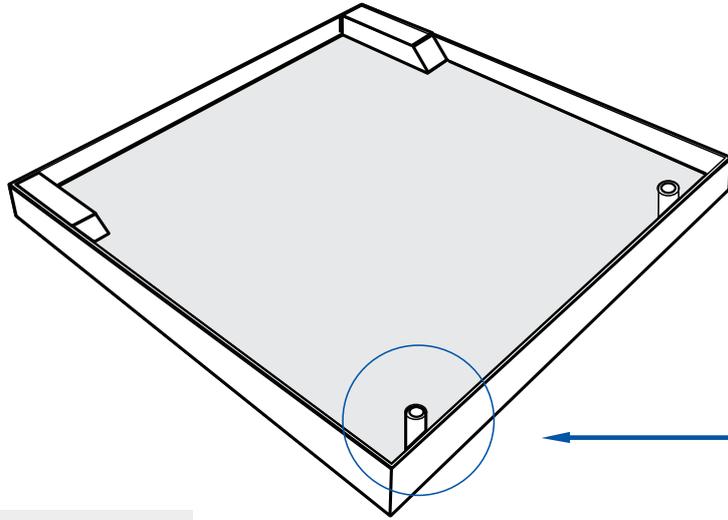


Remove cover securing bolt and open cover using **Lifting Key**.


Lifting Key

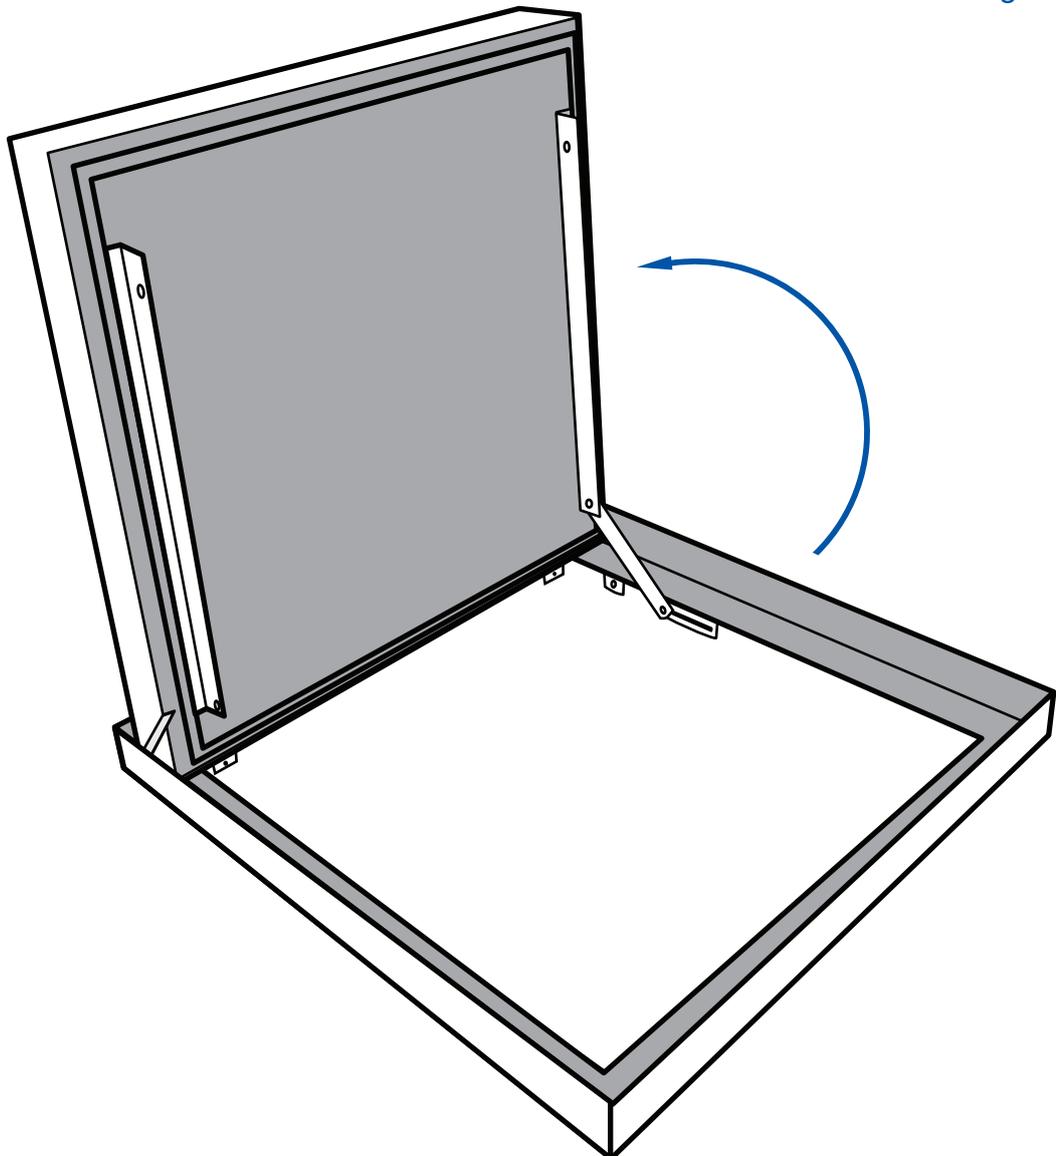


Remove the two **Hinge Bolts**,  
**Safety Stay** and lift out cover.




Hinge Bolt

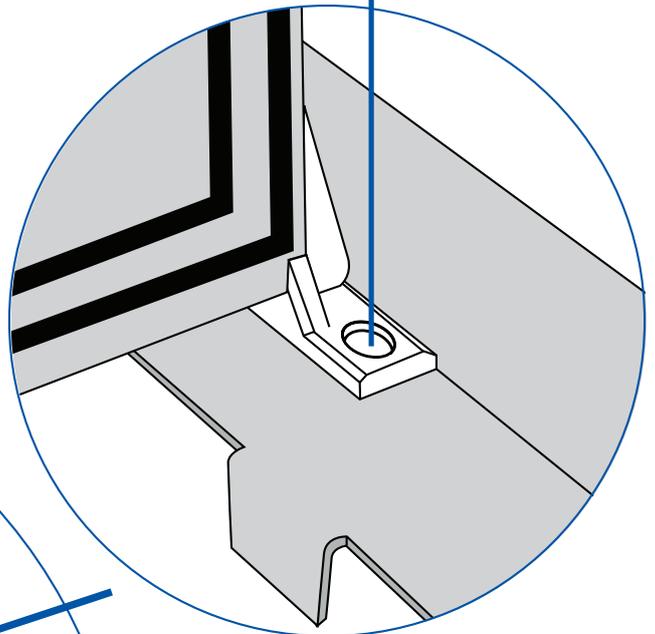


Hinge

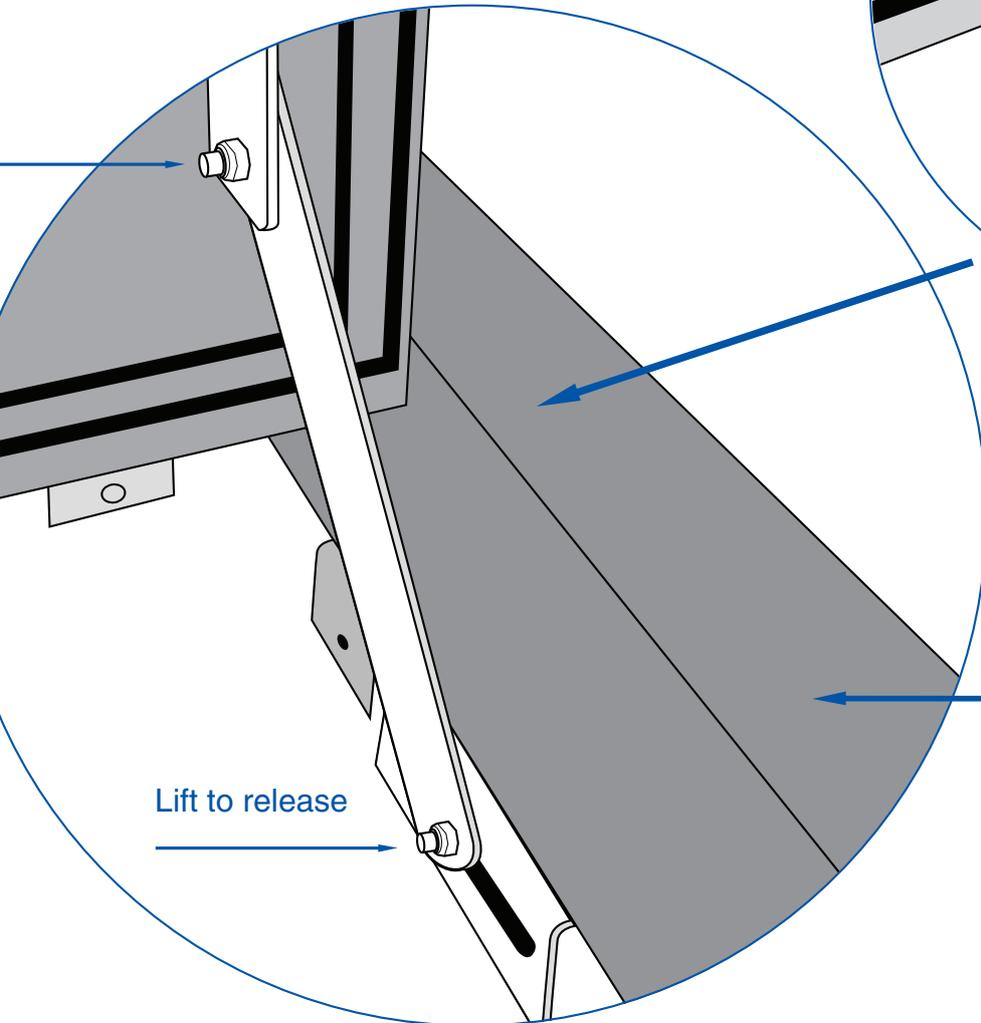

Lift to release

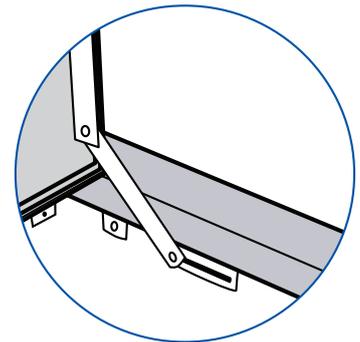


Safety Stay

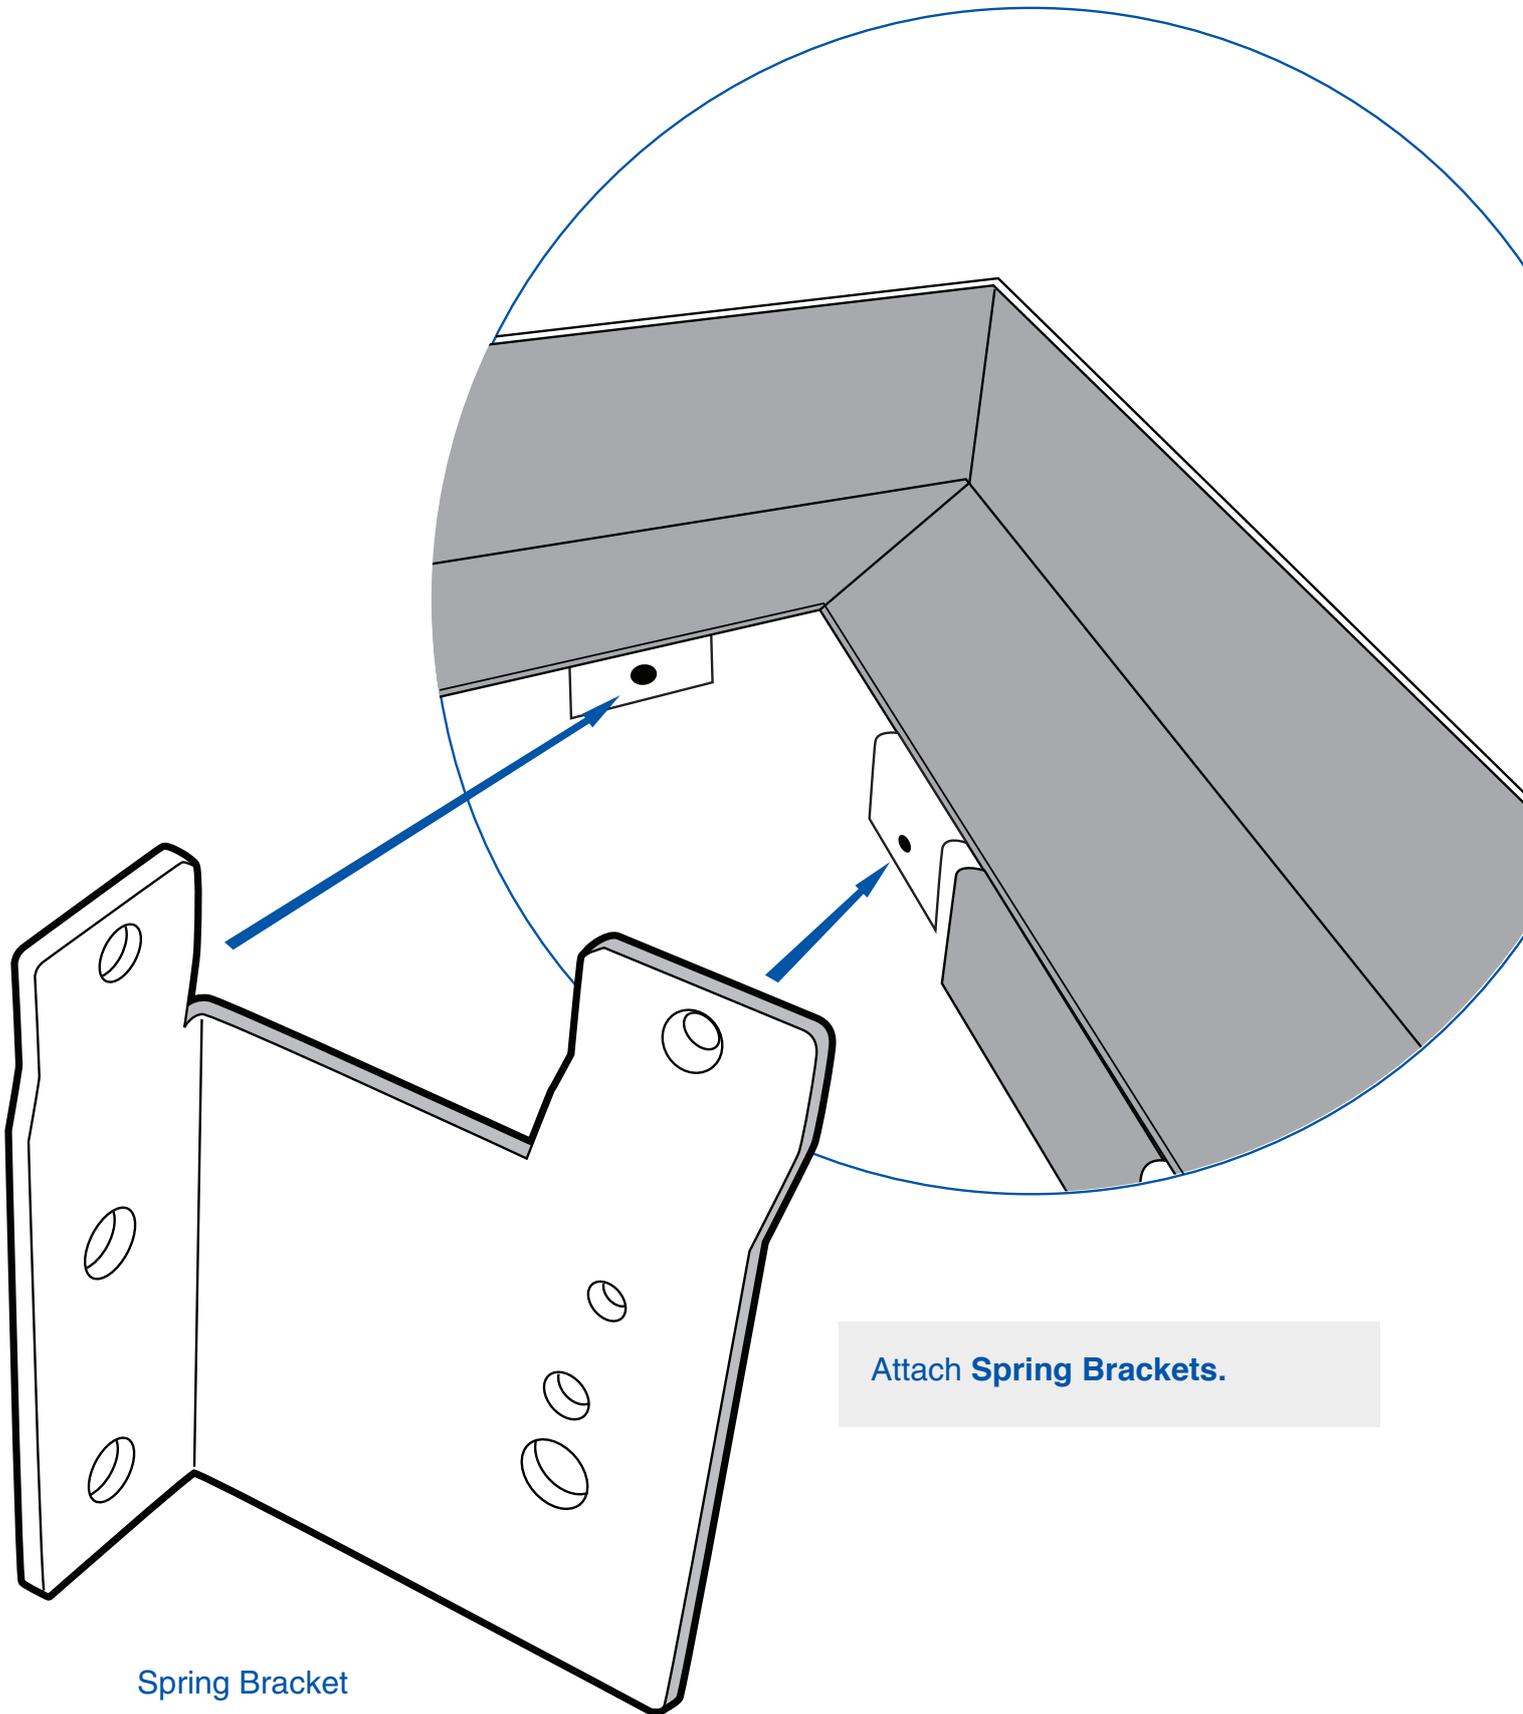




Attach **Spring Brackets**.

Position outer frame over pit, bedding on sand and cement, ensuring spring brackets are in contact with the vertical pit wall.


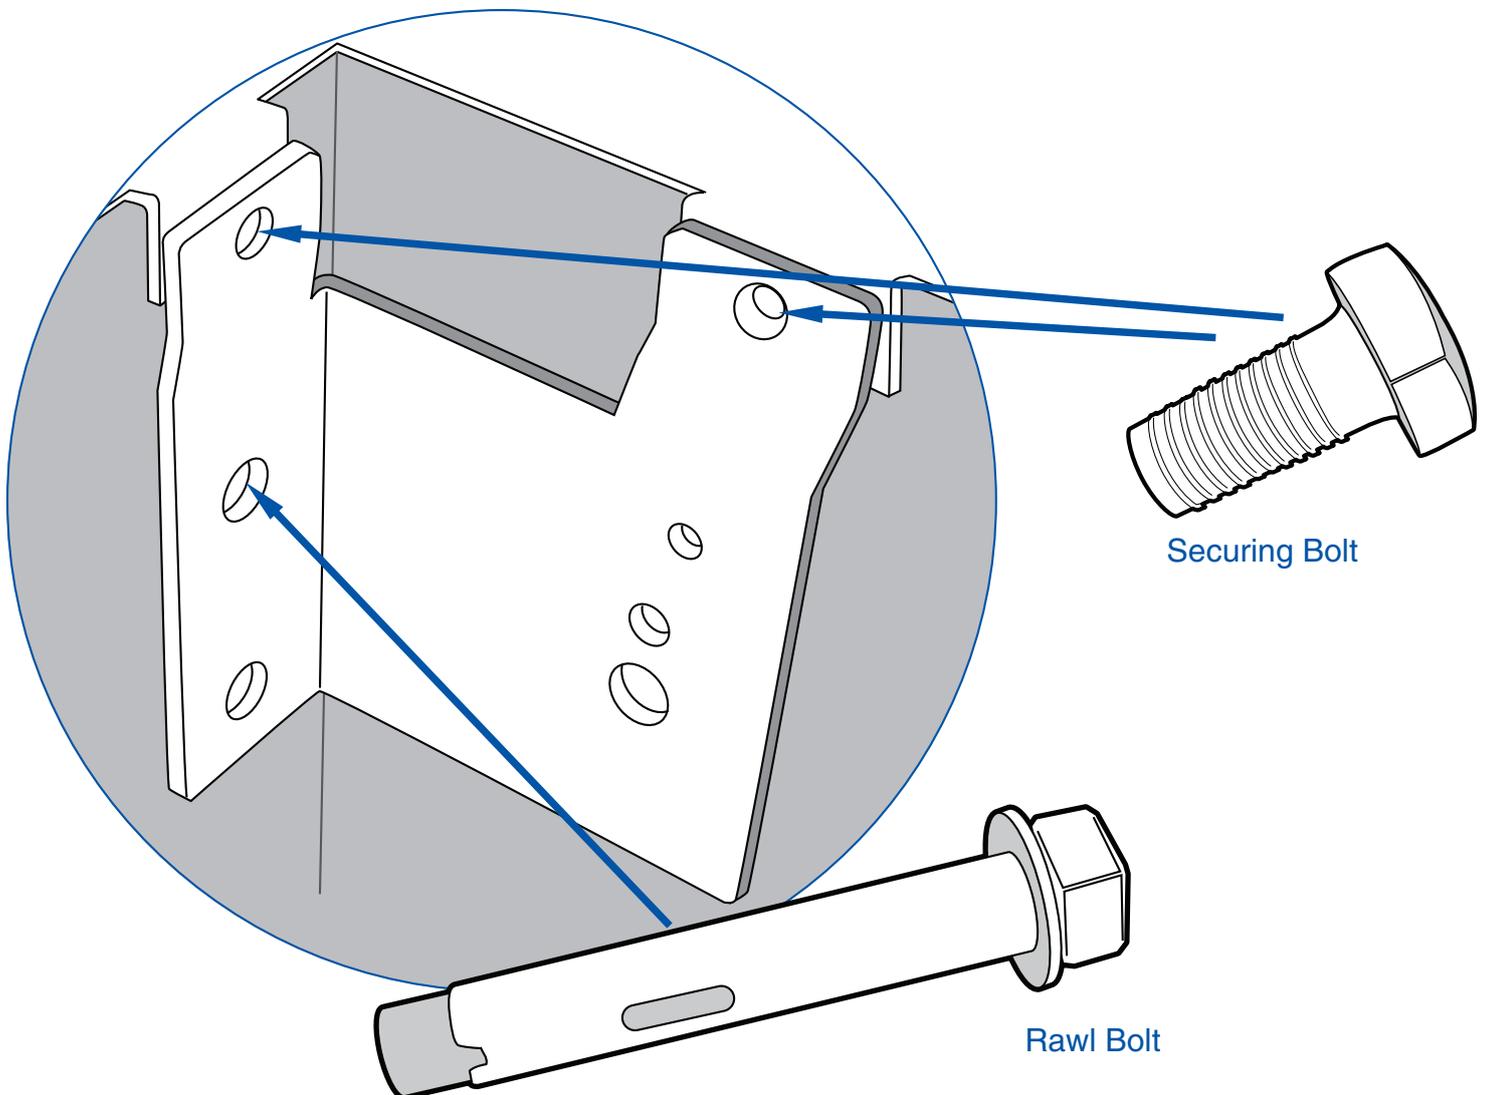


Drill holes in pit walls. Affix bracket against wall with **Rawl Bolt** and tighten **Securing Bolts**.


Replace cover, re-attaching **Safety Stay** and **Hinge Bolts**.

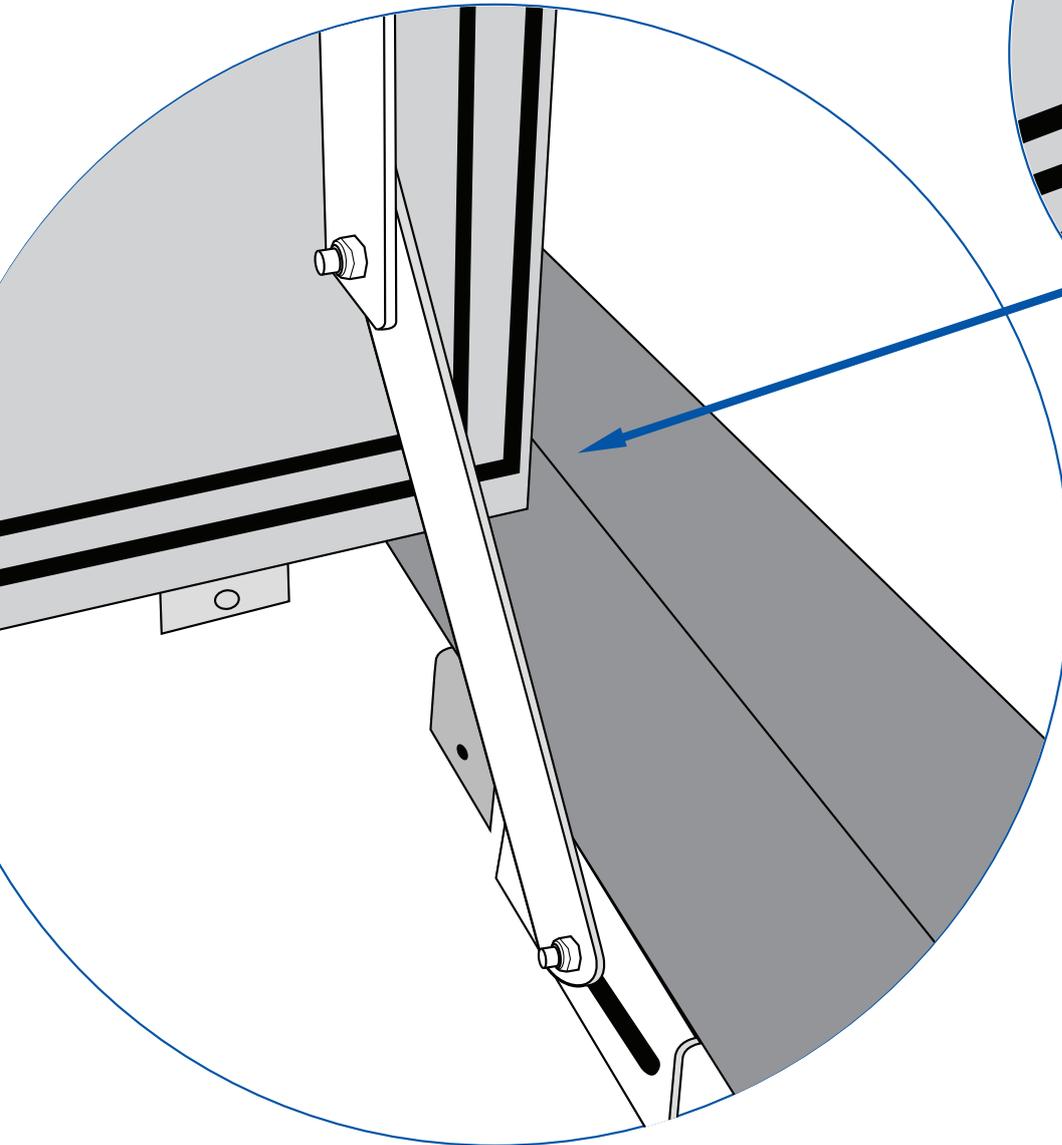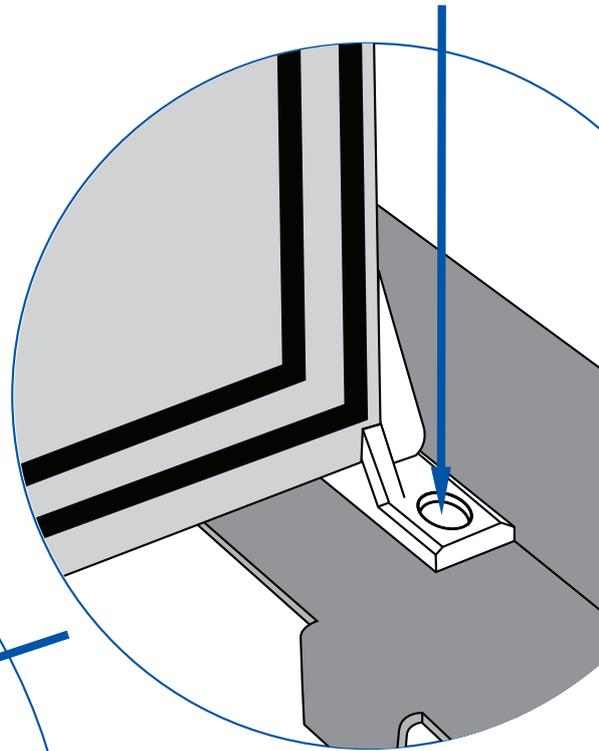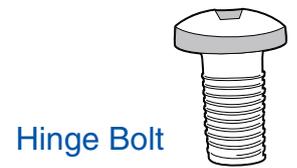

Close cover placing spacers between the cover and outer frame prior to filling and tiling. Fill cover and tile surrounding area, ensuring that the infill has the equivalent strength of 40MPa concrete when fully cured. Fix **Lifting Eyes** to cover, using bolts supplied. Open cover with **Lifting Bar**.

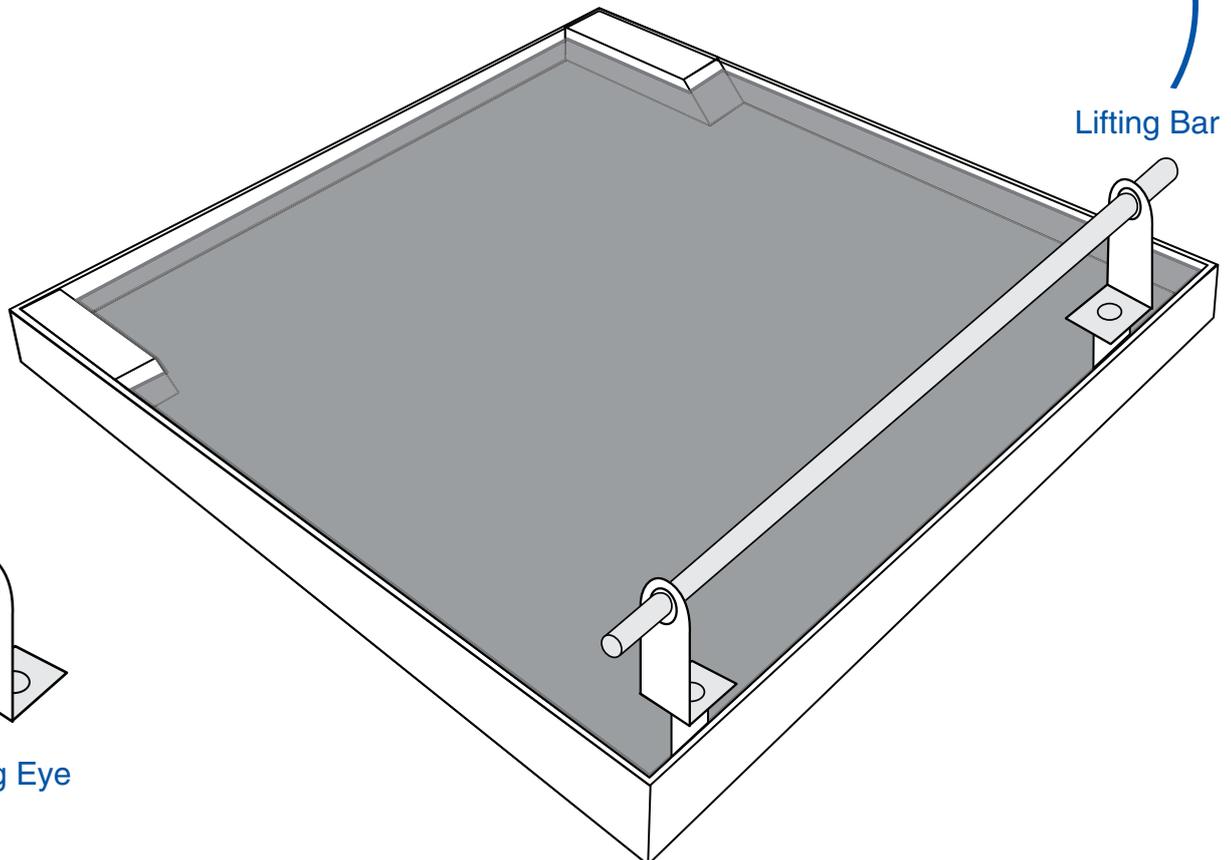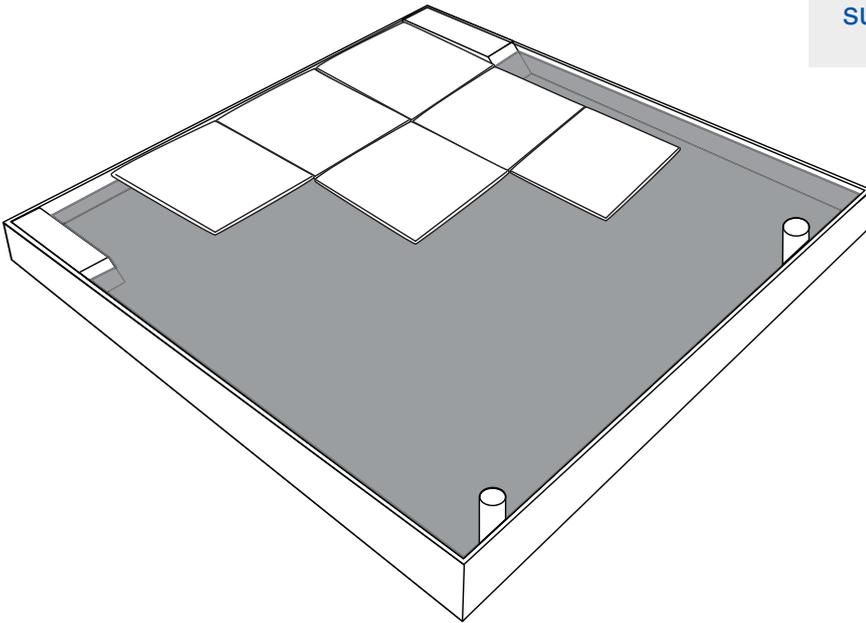


Lifting Bar



Lifting Eye

Open cover using **Lifting Bar**, attach **Gas Springs** as marked on spring and adjust **Hinges** accordingly to maintain a 1mm gap between cover and frame.

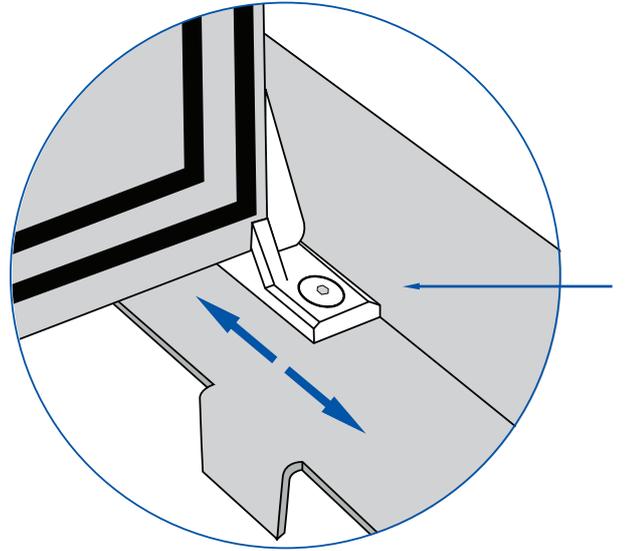

Hinge Bolt

